


S500005
S500006
S500017
S500018

Manocontact de déclenchement

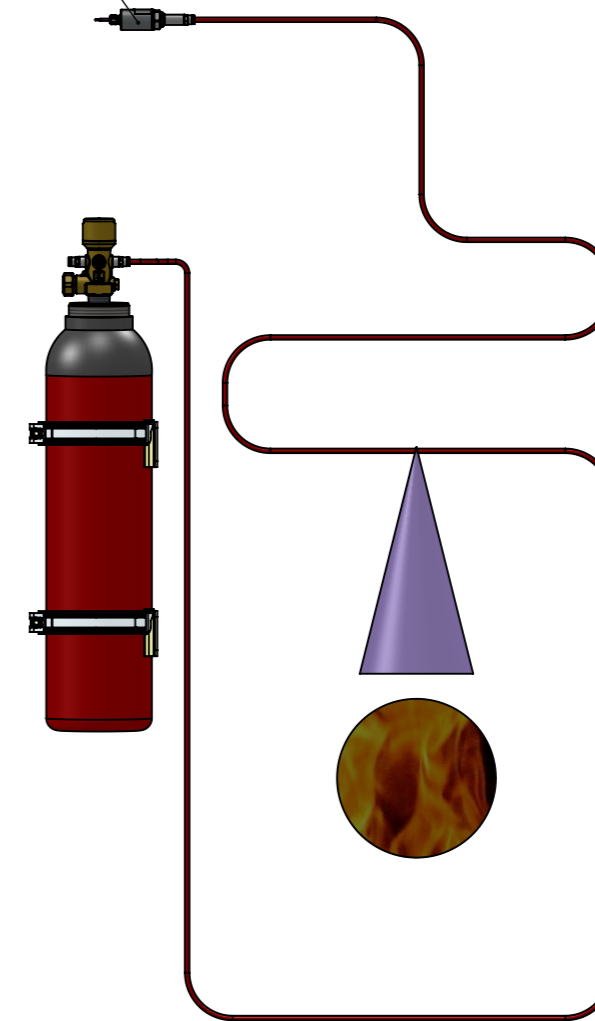

SYSTEME DIRECTE

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO16016)

general tolerances: DIN ISO 2768-1 m	test method for surface control in accordance to DIN EN ISO 3274	All non-dimensioned edges: -0,2 / +0,2	$\sqrt{x} = \sqrt{Ra} \times X$	weight (gr): surface (mm ²):	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS
shape and positional tolerances: DIN ISO 2768-2 H				material: Material <not specified>	
				part name:	
index	revision	description of the revision		name	date
		Extinction NEP 26rue le Bochet B-6792 Belgique +32 63 233423		date: 09/06/2016 name: reviewed:	DWG NO. IS500-DHP index
				A3	SCALE:1:20 SHEET 1 OF 1